



## LED Canopy Light 500 Series Installation Manual



### 1. Surface Ceiling Mounting

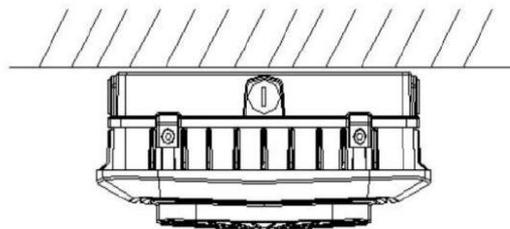


1.

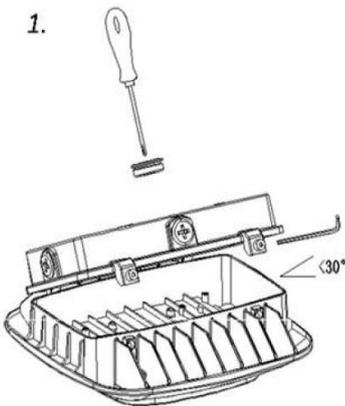


1. Remove the 3/4 plug with a cross screwdriver and take it out. After loosening the screw with an Allen wrench, keep the back cover opened ( the angle is less than  $30^{\circ}$  ) and

2.

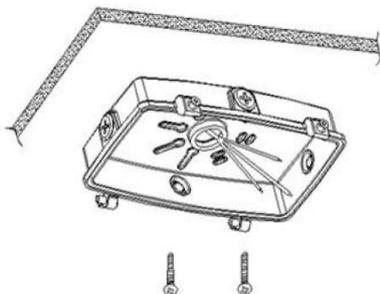


2. Cut off the power supply, use tools to knock out the corresponding installation holes of the back cover, put the input wire through the hole, fix the back cover on the ceiling with screws, and make necessary waterproof protection.

## LED Canopy Light 500 Series


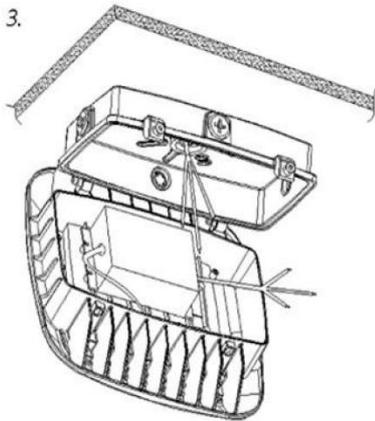


3. Hang the lamp on the back cover at less than 30 degrees, let the lamp fall naturally, and then connect Live line, Neutral line and Earth line.

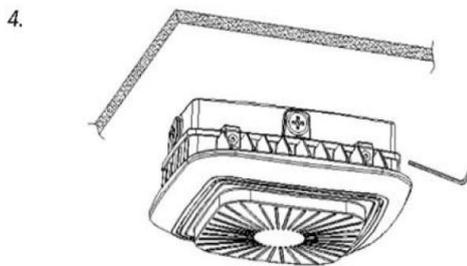


4. Turn over and close the lamp body, lock the screw with the Allen wrench, and install it.

## 2. Pendant Mounting

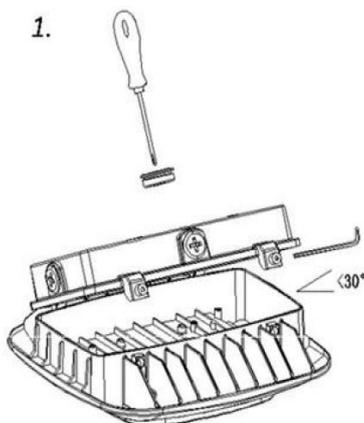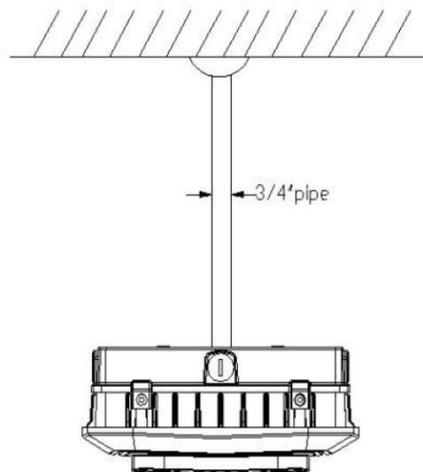


1. Remove the 3/4 plug with a cross screwdriver and take it out. After loosening the screw with an Allen wrench, keep the back cover opened ( the angle is less than  $30^\circ$  ) and take it out after turning over.


### LED Canopy Light 500 Series

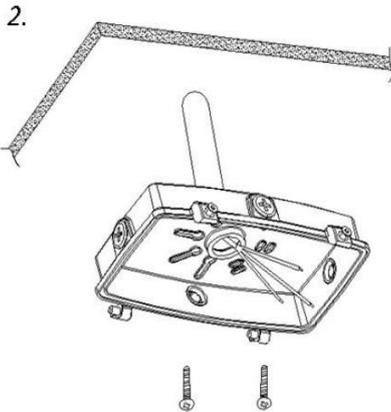

2. Cut off the power supply, rotate the back cover into the 3/4 thread pipe, put the input wire through the hole and make necessary waterproof protection.

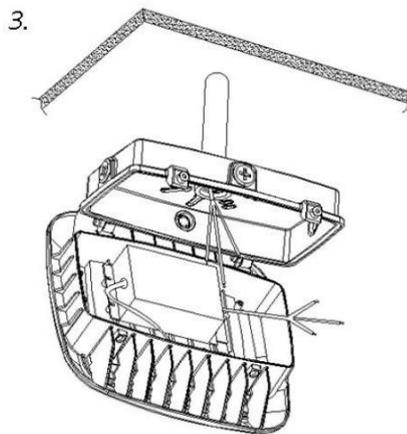



3. Hang the lamp on the back cover at less than 30 degrees, let the lamp fall naturally, and then connect Live line, Neutral line and Earth line.

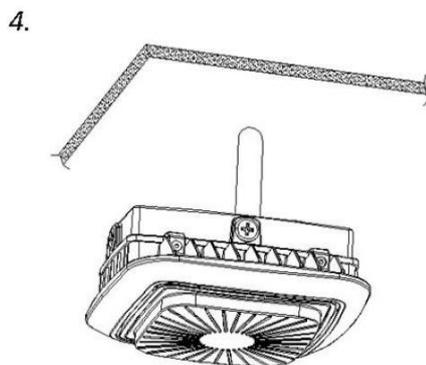


4. Turn over and close the lamp body, lock the screw with the Allen wrench, and install it.

### LED Canopy Light 500 Series


#### 3. Horizontal Mounting

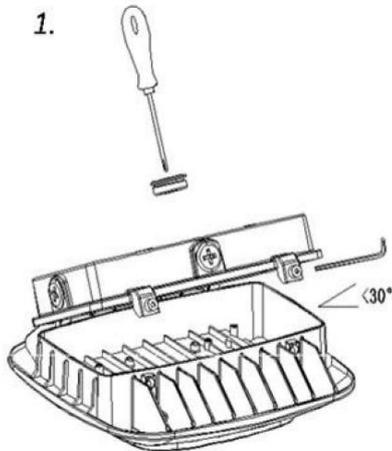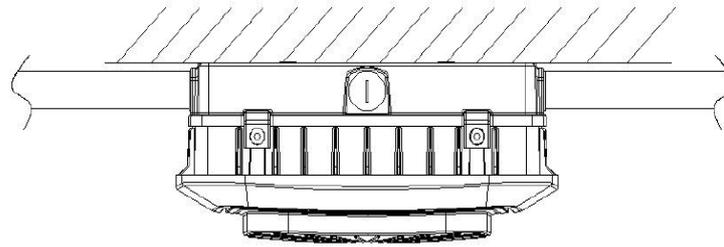


1. Remove the 3/4 plug with a cross screwdriver and take it out. After loosening the screw with an Allen wrench, keep the back cover opened ( the angle is less than  $30^{\circ}$  ) and take it out after turning over.

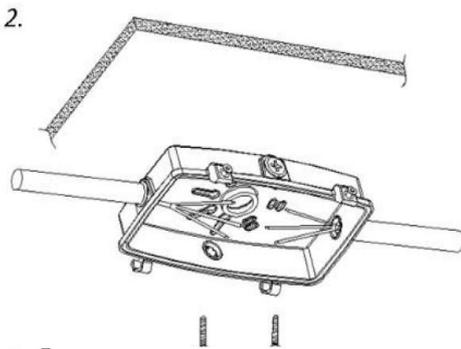

2. Cut off the power supply, rotate the back cover into the 3/4 thread pipe, put the input wire through the hole and make necessary waterproof protection.

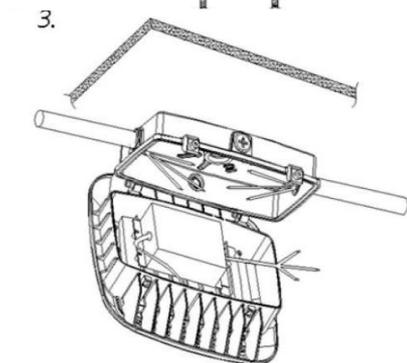

3. Hang the lamp on the back cover at less than 30 degrees, let the lamp fall naturally, and then connect Live line, Neutral line and Earth line.

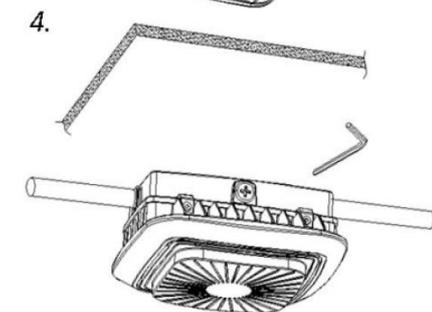

4. Turn over and close the lamp body, lock the screw with the Allen wrench, and install it.