

# MORSTAR INC



12868 Farmington Road, Livonia, Michigan 48150, USA

Phone: +1-877-977-3732 FAX: +1-866-936-1782 Email: sales@morstar.com Website: www.morstar.com

## LED Vapor Tight Light Specs



### Features

1. Efficacy up to 130lm/w.
2. Continuous dimming, dim to 10%.
3. Suitable for wet location.
4. The driver ensures steady performance and long lifetime.
5. 5 year warranty on the entire luminaire.
6. Mounting: fixture may be surface, pendant, or stem mounted.
7. Standard lifetime: designed minimum 50,000 hours.

### Applications

- ◆ Industrial and commercial applications.


For use as utility lighting, parking garage and stairwell lighting where meets applicable building and safety codes.

Model NO.	Voltage	Power	CCT	Power Factor	Efficacy	CRI	Lifespan	Certificate
MA-HVP481J	AC 120-277V	34/38/45W Adjustable	3500/4000/5000K	0.9	130lm/W	80	>50000hrs	UL/cUL; DLC

### Product Dimension

Model NO.	Length	Width	Depth
MA-HVP481J	47.2"	3.5"	3"

### Wiring Diagram

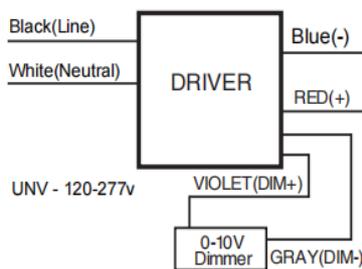


LED Vapor Tight Light Specs

Installation Manual

Surface Mounting



**1** Mark the bracket install hole's position on the wall. The distance is 310+/-20 mm for 2FT, 840+/-20mm for 4FT, 1140+/-20mm for 5FT

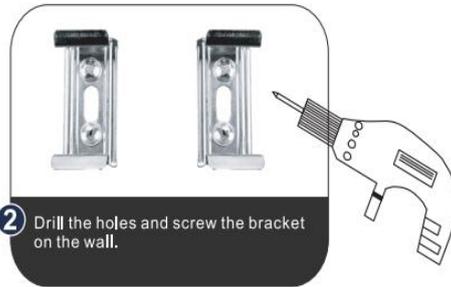

**2** Drill the holes and screw the bracket on the wall.




**3** Stuck the light to the bracket.




**4** Connect the light to the electric supply, make sure the L/N/GND connect correct, use a waterproof connector if is necessary. Please make sure metal cover to enclose the outlet box. Done.


Suspension




**1** Check the suspension cable and screws.



**2** Mark the bracket install hole's position on the wall. The distance is 280+/-20 mm for 2FT, 830+/-20mm for 4FT, 1110+/-20mm for 5FT

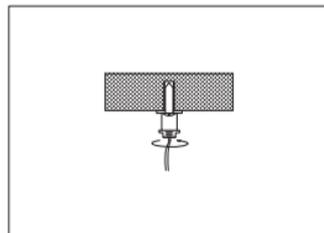

**3** Screw the suspension cable on the ceiling



**4** Connect the drive to the electric supply, make sure the switch is off and the L/ GND/N connect correct, Please make sure metal cover to enclose the outlet box. done