


LED SMART WALLPACK LIGHT



SMART 400ES SERIES

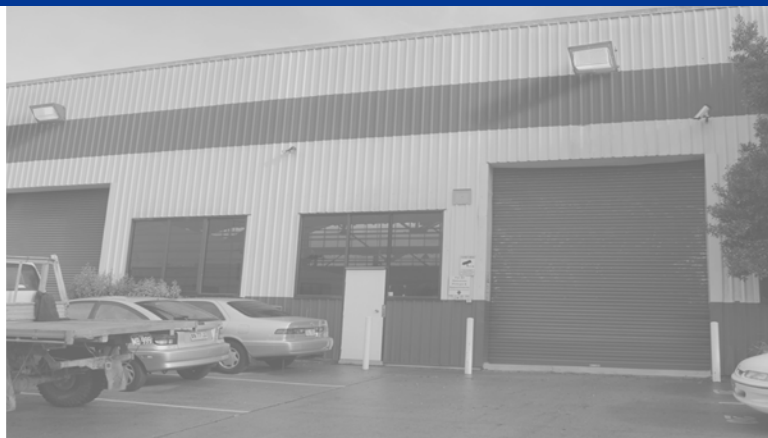


PRODUCT DESCRIPTION:

The LED Wallpack 400ES is a Power & CCT Selectable LED Wall Pack, which has many options for different countries and applications. The power supply and the optical part are separated, so the lifespan of the fixture is also extended. Through Bluetooth meshed technology and intelligent control system, brightness adjustment, schedule management, motion detection, group control, and ambient light adjustment can be achieved on App or Saas.

CONTROLS:

- Wireless occupancy and daylight sensor
- Led Driver with built-in wireless BlueTooth module

DIMENSION DRAWING:

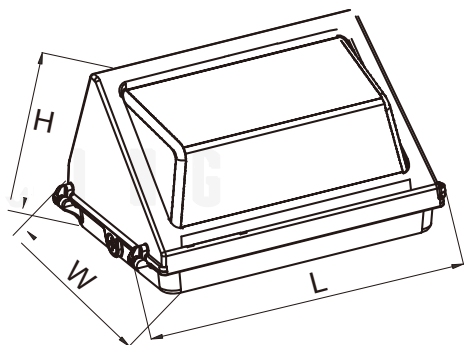

FEATURES:

- Easy installation
- Long Lifespan. Premium 2835 LED chips lasting over 50,000 hours.
- UV Resistance No Discoloration
- Strong housing and Anti-yellow glass.
- Integral Heat Sink
- Save up to 85% ENERGY

APPLICATIONS:

- Building facade, commercial
- Industrial, retail
- Hospitality buildings

WARRANTY:

- 5-year standard warranty

DIMENSION CHART:

MODEL	L (INCH)	W (INCH)	W (INCH)
40-50-60W	14.21"	9.29"	7.6"
80-100-120W	14.21"	9.29"	7.6"



PARAMETER

Ordering information MA-EWP401ES-60W-CCT-D-HV-M-B

FAMILY	WATTAGE	CCT	D	HV	SENSOR MODEL	OPTIONS
MA-EWP401ES= LED Wallpack Light 400ES Series	40-50-60W 80-100-120W Power Selectable	30K=3000K 40K=4000K 50K=5000K ¹ TCP= 3CCT Selectable	Dimming	HV=347V LV=277V	M=Microwave P=PIR	B=BLE Control EM= Emergency Driver



¹TCP=3000K/4000K/5000K DIP Selectable

SPECIFICATION:

		MA-EWP401ES-60W	MA-EWP402ES-120W
ITEM	SPECIFICATION	DETAILS	
GENERAL PERFORMANCE	Power Consumption	40-50-60W	80-100-120W
	Equivalent Wattage	100-120W MH	150-250W HID
	Lumens Delivered	up to 8400lm	up to 16800lm
	Efficacy	140 LM/W (±10%)	
	CRI	>70	
	Color Temperature	3000K / 4000K / 5000K adjustable	
	L70 Lumen maintenance	70,000Hrs	
ELECTRICAL	Power Factor	≥0.9	
	Input Voltage	120-277VAC/120-347V	
	Wattage Adjustable	40-50-60W	80-100-120W
	Dimming	0-10v	
PHYSICAL	Mounting	Wall-mount	
	Operating Temperature	-40°F to 113°F	
	Humidity	Operating Humidity: RH<90%	
QUALIFICATION	Qualifications	UL / DLC Premium	
	Material Usage	RoHS compliant; no mercury	
	Environment	Outdoor / Wet, IP65	
	Warranty	5 Year Warranty	

*To stem mount product,remove hook in the field.

ACCESSORIES (For APP Smart Fixture):



MODEL NUMBER	DESCRIPTION	IMAGE
MA-LH101M	Bluetooth microwave motion sensor	
MA-LH201P	Bluetooth PIR motion sensor	




PHOTOMETRIC REPORTS

Photometric values based upon tests performed in compliance w/ LM-79.

MA-EWP401ES Series

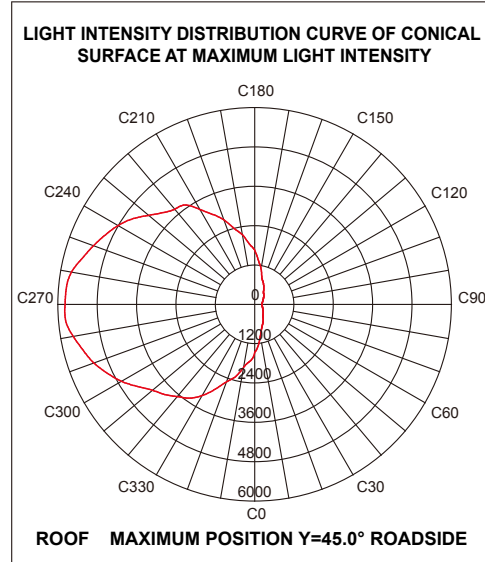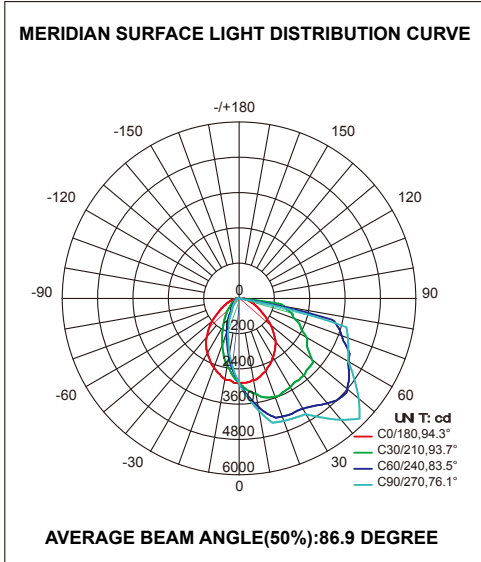

MICROWAVE SENSOR COVERAGE:

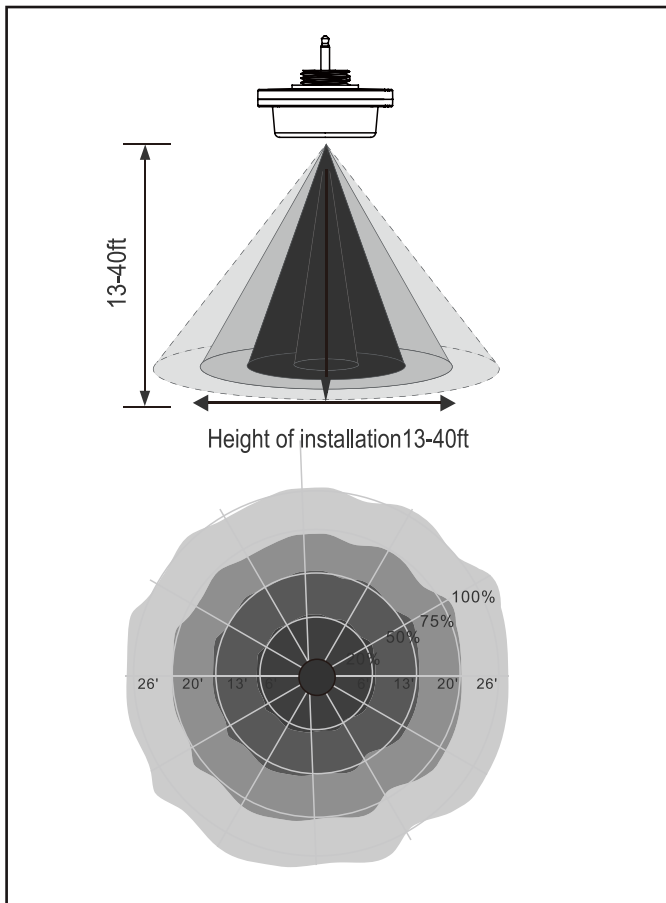

PIR SENSOR COVERAGE:

